


Reed Switch Selector Guide



Switch Name	Key Features	Contact Form	Switching Power Max (W)	Switching Voltage Max (Volt)	Switching Current Max (Ampere)	Standard Sensitivity (Pull-In Range)	Glass Body Length Max (mm)	Overall Length (Wires) (mm)	Glass Body Diameter Max (mm)	Wire Diameter Nominal (mm)
MITI-3V1	Ultra Small (7mm glass body)	A	10 W	170 Vdc	0,5 Adc	5-16	7.00	46.00	1.80	0.38
MDSR-10	Very Small (10mm glass body)	A	10 W	200 Vdc	0,5 Adc	10-25	10.16	40.38	1.80	0.43
MDSR-7	Small (12.7mm glass body)	A	10 W	200 Vdc	0,5 Adc	10-25	12.70	40.38	1.80	0.47
FLEX-14	Flexible Leads (14mm glass body)	A	10 W	200 Vdc	0,5 Adc	10-30	14.00	44.30	2.28	0.47
MDCG-4	General Purpose Switch	A	10 W	200 Vdc	0,5 Adc	12-38	15.24	40.38	2.28	0.50
MDRR-6	240 VAC switching	A	10 W	265 Vac	0,35 Aac	17-38	15.24	40.38	2.28	0.50
MLRR-4	Small Hysteresis (Differential)	A	20 W	200 Vdc	1,0 Adc	17-38	15.24	40.38	2.54	0.61
MLRR-3	Long Leads, Switching Load/Life	A	20 W	200 Vdc	1,0 Adc	17-38	15.24	56.64	2.54	0.61
MARR-5	Very High Voltage	A	10 W	1000 Vdc	0,5 Adc	17-38	19.69	56.77	2.66	0.55
MRPR-1	Wide Hysteresis (Differential)	A	50 W	200 Vdc	1,0 Adc	22-43	19.69	56.64	2.84	0.63
MRPR-3	High Power	A	50 W	200 Vdc	1,5 Adc	22-43	19.69	56.64	2.84	0.63
MRPR-8	240 VAC switching, High Power	A	50 W	265 Vac	0,7 Aac	22-43	20.32	56.64	2.84	0.63
DRR-129	Big, High	A	100 W	400 Vdc	3,0 Adc	42-83	50.80	82.55	5.25	Flattened
MDRR-DT	Small	C	5 W	175 Vdc	0,25 Adc	15-30	14.73	51.66	2.54	0.51 & 0.56
DRR-DTH	Big Power	C	30 W	500 Vdc	0,5 Adc	50-80	39.67	85.73	5.33	1.02 & 1.27
DRT-DTH	Big High Power	C	50 W	500 Vdc	1,5 Adc	50-80	39.67	85.73	5.33	1.02 & 1.27

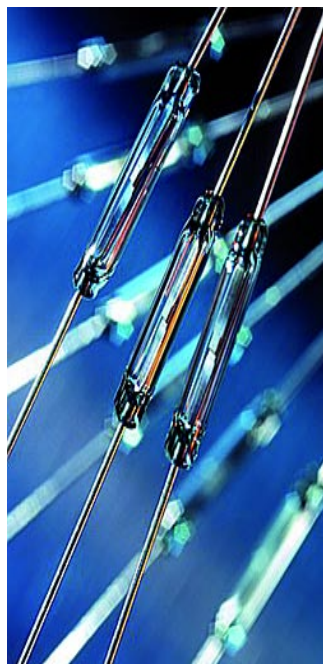

H A M L I N

Zur Beachtung: Es handelt sich hierbei um eine Illustration und nicht um ein Datenblatt. Dieses senden wir Ihnen auf Anfrage gerne zu.

REHAG ELEKTRONIK GmbH – Bereich Industrieelektronik

Tel. 04261 / 9388-120 FAX. 04261 / 9388-920

ottermann@rehag.de – www.rehag.de